


AIMB-275A2

Intel® Core™ i7/i5/i3 LGA 1151 Mini-ITX with DP++/HDMI/LVDS(eDP), 2 COM, Dual LAN, PCIe x16, M.2, DDR4, DC Input

NEW

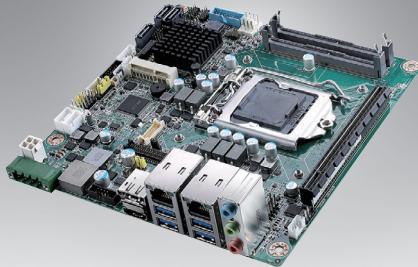

WISE-PaaS/DeviceOn

Specifications

	CPU	KBL-S SKL-S	i7-7700 i7-6700	i7-7700T i7-6700TE	i5-7500 i5-6500	i5-7500T i5-6500TE	i3-7101E i3-6100	i3-7101TE i3-6100TE	- Pentium G4400/4400TE	- Pentium G3900/3900TE
Processor System	Core Number		4	4	4	4	2	2	2 / 2	2 / 2
	Max Speed	KBL-S SKL-S	3.6GHz 3.4GHz	2.9GHz 2.4GHz	3.4GHz 3.2GHz	2.7GHz 2.3GHz	3.9GHz 3.7GHz	3.4GHz 2.7GHz	3.3GHz / 2.9GHz	2.8GHz / 2.6GHz
	L3 Cache		8M	8M	6M	6M	4M/3M	4M	3M / 3M	2M / 2M
	TDP		65W	35W	65W	35W	54W / 51W	35W	54W / 35W	51W / 35W
	Chipset		Q170 / H110							
BIOS		AMI UEFI 128 Mbit SPI								
Expansion Slot	M.2	1, B key for SSD and 3G supported (Type: 2242, 2280mm)								
	Mini-PCIe	1, F/S miniPCIe slot (with mSATA supported)								
	PCIe x16 (Gen3)	16 GB/s per direction, 1 slot								
Memory	Technology	2133/2400 MHz SDRAM								
	Max. Capacity	32GB (up to 16GB per SO-DIMM)								
	Socket	2 x 260 PIN DDR4 SO-DIMM (Non-ECC)								
Graphics	Controller	Supports OpenGL 5.x, DirectX12, OpenCL 2.X								
	VRAM	Shared system memory, 2 GB and above, total system memory shared 1 GB maximum video memory								
	LVDS	Supports dual channel 48-bit up to 1920 x 1200								
	HDMI	Yes, supports max. resolution 4096 x 2160 @60 Hz (HDMI 2.0)								
	eDP	Yes, with internal pin header, supports max. resolution 4096 x 2160 @ 60 Hz								
Ethernet	Display Port 1.2	Yes, supports max. resolution 3840 x 2160 @ 60Hz								
	Triple Display	DP+++HDMI+LVDS, DP+++HDMI+ eDP								
	Interface	10/100/1000 Mbps								
SATA	Controller	GbE LAN1: Intel i219LM; LAN2: Intel I211AT								
	Connector	RJ-45 x 2								
Rear I/O	Max Data Transfer Rate	600 MB/s (SATA 3.0)								
	Channel	3 (2 SATAIII, 1 SATA DOM)								
	HDMI	1 (HDMI 2.0 or HDMI 1.2)								
	Display Port 1.2	1								
	Ethernet	2								
Internal Connector	USB	4 (USB 3.0)								
	Audio	3 (Mic-in, Line-out, Line-in)								
	Phoenix Connector	1								
	USB	6 (2 USB 3.0, 4 USB 2.0)								
	LVDS/inverter	1								
	Serial	2 (1 RS-232, supports 5V/12V, 1 RS-232/422/485)								
	SATA	3 (SATA 3.0)								
	Mini-PCIe	1 (F/S x1, mSATA supported)								
	M.2	1 (B Key for SSD and 3G supported)								
Watchdog Timer	IrDA	-								
	GPIO	8-bit								
Power Requirements	Output	System reset								
	Interval	Programmable 1 ~ 255 sec/min								
Environment	Input power	12 ~ 24V DC Input								
	Temperature	Win Idle 19.28W (Intel core i7-6700 3.4GHz / DDR4 2133MHz 8GB x 2)								
Physical Characteristics	Operating	Non-Operating								
	Temperature	0 ~ 60° C (32 ~ 140° F), depends on CPU speed and cooler solution								
		-40 ~ 85° C (-40 ~ 185° F)								
	Dimensions	170 mm x 170 mm (6.69" x 6.69")								


Downloaded from StockCheck.com

ADVANTECH Industrial Motherboards & Systems

All product specifications are subject to change without notice.

Last updated: 31-Dec-2019

Block Diagram

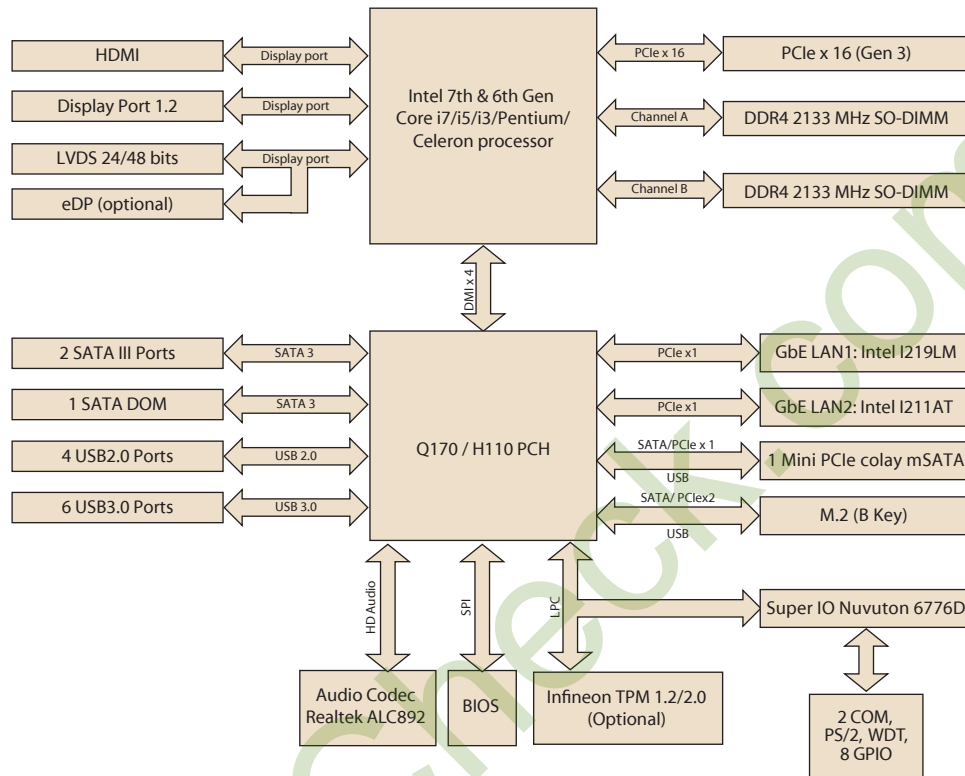

Ordering Information

P/N	Chipset	DP	LVDS/eDP	HDMI	GbE LAN	COM	M.2	SATA	USB 3.0/2.0	MiniPCIe	TPM	AMP	PCIex16
AIMB-275G2-00A2E	Q170	1	1/(1)	1 (HDMI 2.0)	2	2	1	3 (1 SATA DOM support)	6/4	1 (F/S)	(1)	(1)	1
AIMB-275VG-00A2E	Q170	1	0	1 (HDMI 1.2)	1	2	0	3	4/4	1 (F/S)	(1)	(1)	1
AIMB-275L-00A2E	H110	1	0	1 (HDMI 1.2)	1	2	0	3	4/4	1(F/S) mSATA only	(1)	(1)	1

*() BOM options available on MP version.

Packing List

Part Number	Description	Quantity
1700003194	SATA HDD cable	1
1700018785	SATA power cable (1 port, 35cm)	1
1700100250	Serial port cable	1
1920001186T020	I/O port bracket	1
2006027511	Startup manual	1
1700023082-11	ATX cable 2*10P-4.2/1*3P-2.0 15cm	1
1930006770-01	M.2 Screw	1
1910001675	M.2 POST	1
1930001071	MiniPCIe Screw	1

Optional Accessories

Part Number	Description
1700026162-01	USB 2.0 cable with two ports, 30 cm with bracket
1700020277-01	Dual port USB 3.0 cable 30cm with IO bracket
1703060191	KB/MS cable 1*6P-2.0/M-DIN 6P(F)*2, 19cm
1700023768-01	1x4P Phoenix to DC Jack 15cm cable
1960053207N001	LGA1150 CPU cooler for CPU TDP ≤ 65W, 92.9 (W) x 92.9 (L) x 46 (H) mm
1960060732N001	LGA1150 CPU cooler for CPU TDP ≤ 45W, 80 (W) x 80 (L) x 32.2 (H) mm
96PSA-A120W12P4	ADP A/D 100-240V 120W 12V C14 TERMINAL BLOCK 4P

Riser Card

Part Number	Description
AIMB-RF10F-01A1E	1U riser card with 1 PCIe16 expansion
AIMB-RF20F-02A1E	2U riser card for 1xPCIex16 to 2 PCIe16 (both Lane are PCIeX8 only)

** compliant with AIMB-275G2/VG (Q170) sku only

Optional Chassis

Part Number	Description
AIMB-B2000-15ZE	Mini-ITX chassis with 150W ATX power supply
AIMB-B2000-00YE	Mini-ITX chassis (Optional external AC-DC 60W/84W Adaptor)

I/O View

